

SERIES

ML20-350



Standard Accessories:

- 15m 4-core oil resistance electric cable with 4-pin plug
- 20m wear resistance high pressure hose with Stainless steel fittings
- High Pressure gun with 900mm lance and stainless steel nozzle
- User manual book with part list

Optional Accessories:

- Extension hoses with connectors
- Extension cables
- Rotating nozzle
- Drain and pipe cleaning nozzles
- Spare part kits
- Sandblasting kit with boron carbide nozzle
- High Pressure protection clothing, helmet with face shield and earmuff
- Hose protection

Marlin

High Pressure Water Blaster

350bars

Marlin **ML20-350 Series** is a professional heavy duty high-pressure water blaster with a high-performance crank shaft, ceramic pistons and the simplest design aimed to reduce the Total Cost of Ownership (TCOO). Fully manufactured in Europe, these water blasters are designed to reduce the complexity of maintenance without compromising the quality and durability for heavy duty usage under the toughest conditions.



High Pressure
Cleaning companies



Building Sites
and boat yards



Iron and Steelworks
and engineering firms



F&B



Oil & Gas

SERIES

ML20-350

Highlights

- Made in EU with 100% EU components
- Sturdy full stainless steel tubular frame with removal handle bar
- Triplex ceramic plungers pump
- Asynchronous three-phase 11 kW high-efficiency IP55 motor
- Low water inlet pressure protection switch and alarm
- Unloader valve with pressure release
- Stainless steel pressure gauge with glycerin
- 300 microns water filter with replaceable cartridge
- Control panel with emergency stop and low water inlet pressure sensor error light
- Thermal protection valve to protect damage to pump seals

Contact us


Email

sales@olsomens.com

Website

www.olsomens.com

Marlin

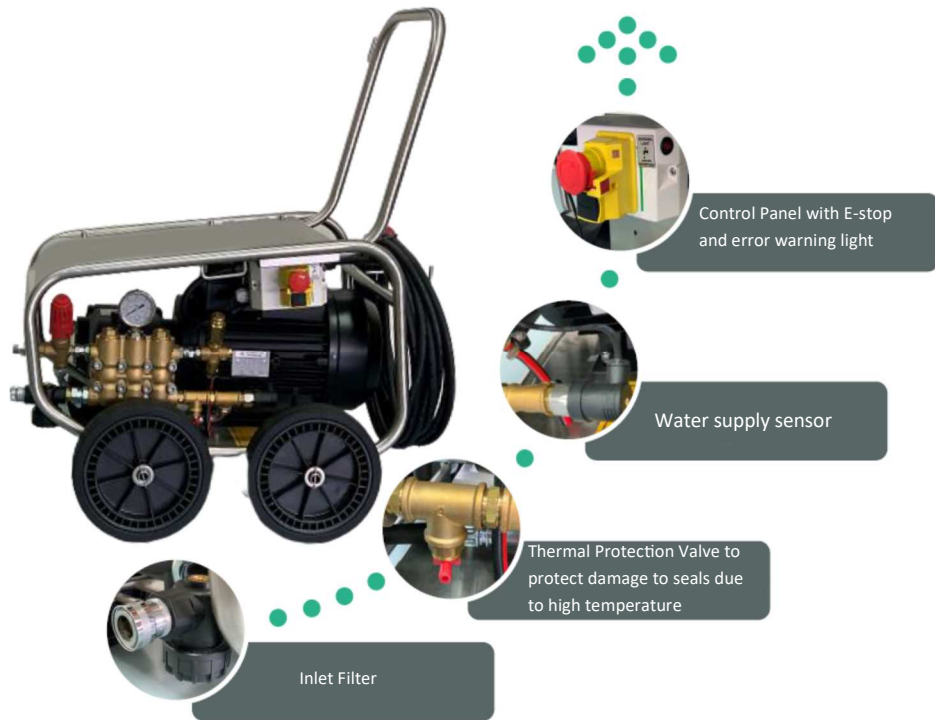

Technical Specifications

	ML20/350-17	ML20/350-20
Pump Pressure (Bar/Psi)	350/5076	350/5076
Flowrate (liter per minute)	17	20.4
Max inlet temperature (°C)	65	65
Power Voltage/phase	380V/3ph	440V/3ph
Power Frequency (hz)	50	60
Power consumption (HP/kW)	15/11	18/13.2
Motor Class	IP 55/F	IP 55/F
Pump RPM	1450	1750
Load Current (A)	19	22
Weight (Kg)	105	105
Dimension (mm)	800 x 580 x 980	800 x 580 x 980